



 Website : [www.aupumachinery.com](http://www.aupumachinery.com)  
 TEL : +86-510-86961162

# Jiangyin Aupu Machinery Co., Ltd.

SGS    CE    诚信通



## Specifications

### 1. Photos







## 2.Y82-80 Main Technical parameter

No.	Parameter content					Note
1	The main pressure cylinder	Type	YG200/140-1300	Nominal thrust	800KN	
		stroke	1300mm	Quantity	1 ste	
2	The chamber size (L×W×H)			1100×700×1800mm		
3	The baled size (L×W×H)			1100×700×(800~1000)mm		
4	Hydraulic system working pressure			25MPa		
5	The compression		Max	1800mm		

	height	Min	500mm		
6	Motor	Type	Y160M-4	Power	11KW
		Speed	1460 r/min	Quantity	1 ste
7	Pump	Type	63YCY14-1B	Displacement	63ml/r
		Speed	16MPa	Quantity	1 ste


## 4.Y82-100 Main Technical parameter

No.	Parameter content					Note
1	The main pressure cylinder	Type	YG220/160-1300	Nominal thrust	1000KN	
		stroke	1300mm	Quantity	1 ste	
2	The chamber size (L×W×H)			1100×1000×1800mm		
3	The baled size (L×W×H)			1100×1000×(800~1000)mm		
4	Hydraulic system working pressure			25MPa		
5	The compression height		Max	1800mm		
			Min	500mm		
6	Motor	Type	Y160L-4	Power	15KW	
		Speed	1460 r/min	Quantity	1 ste	
7	Pump	Type	80YCY14-1B	Displacement	80ml/r	
		Speed	16MPa	Quantity	1 ste	
8	The weight of the baled		(according to materials)			

## 5. Configuration :

- A. Electrical: French Schneider
- B. Oil Pump: Qidong High pressure oil pump
- C. Oil cylinder seals: Germany USK
- D. Oil pipe seals: Germany FOLON.A
- E. Pressure gauge: USA Joseph KK
- F. High pressure hose: Pikes
- G. The tubing connector: USA EATON

# HONORARY CERTIFICATE

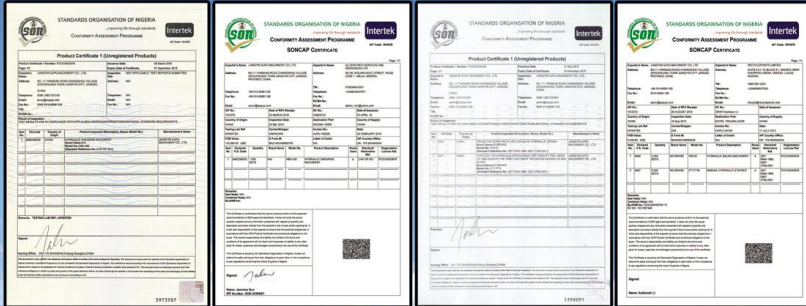

# HONORARY CERTIFICATE

